


SPECIFICATION SHEET

Web site:www.marinco.comPhone:800-307-6702Date:July, 2011Rev: 01

Receptacle, locking 20A, 120/208V 3-phase 4-Pole, 5-Wire

Catalog Number: 2021R

Item:	Receptacle, locking
Rating:	20 amperes, 120/208 volts, 3 phase, 4-pole, 5-wire
Configuration:	NEMA L21-20R
Materials:	All plastic parts are black, glass-filled, heat resistant nylon with a UL flammability rating of 94V-0. Mounting straps, rivets and grounding strip are solid brass.
Terminals:	Clamp-type. Clamp is solid brass, and terminal screws are solid brass, No. 10, slot/phillips head. Grounding terminal is green hex-head wire-binding screw No. 8.
Contacts:	All line contacts are brass, rivetless one-piece construction, nominal 0.045" thick.
Listings:	Underwriters Laboratories, Inc. File E111198 Canadian Standards Association File LR81290
Dimensions:	-1.68

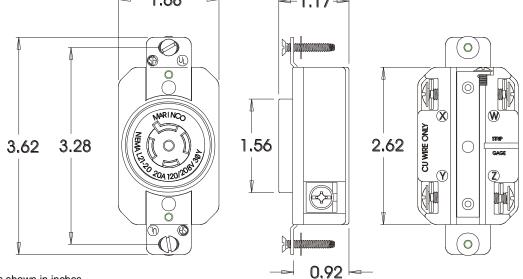

Dimensions shown in inches