


Web site: www.marinco.com
Phone: 800-307-6702
Date: January, 2011 Rev: 00

Receptacle, Locking
30A, 480V, 3Φ
3-Pole, 4-Wire

Catalog Number: 3016R

- Item: Receptacle, single locking.
- Rating: 30 amperes, 480 volts, 3 phase, NEMA configuration L16-30R.
- Materials: All plastic parts are black, glass-filled, heat resistant nylon with a UL flammability rating of 94V-0.
Mounting straps, rivets and grounding strip are solid brass.
- Terminals: Clamp-type. Clamp is solid brass, and terminal screws are solid brass, No. 10, slot/cross head. Cross head accommodates #2 driver.
- Contacts: All contacts are brass, rivetless one-piece construction, nominal 0.045" thick.
- Options: Available without mounting screws (3016R.OEM.NMS).
Available without mounting screws and mounting straps (3016R.OEM.NE).
- Certifications: UL listed, File E111198
CSA certified, File LR81290

Dimensions:

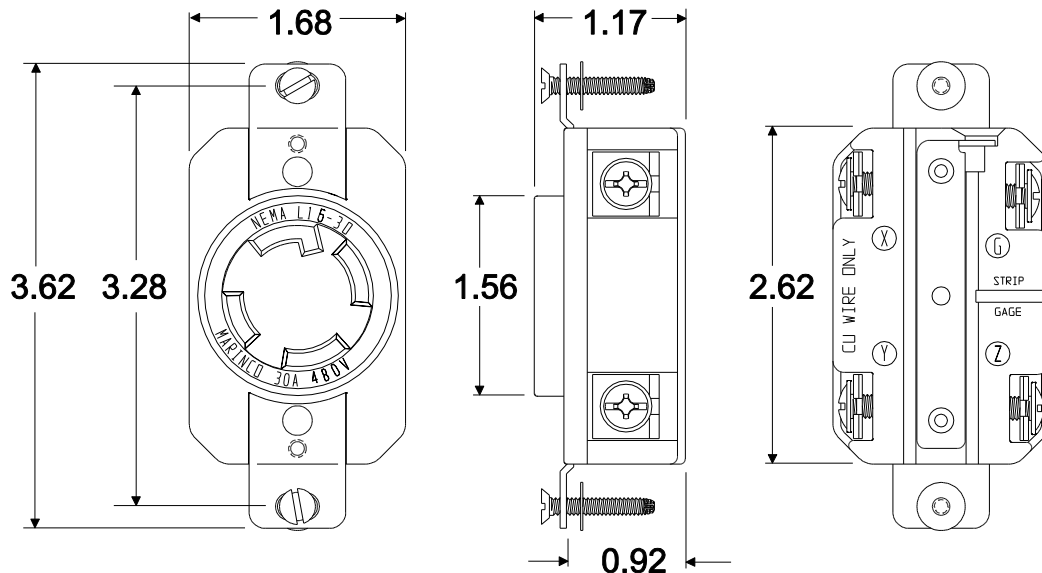

Dimensions shown in inches