

Link

Multi Purpose Bus Bar rated to 75 amps.

Allows for Bus Bars to be separated using insulation partition as supplied (as illustrated) or Bus Bars can be linked together using link supplied.

APPLICATIONS:


- DC negative & positive common or separated.
- AC Neutral Earth (linked or separate).

Insulation Partition

SPECIFICATIONS

Stud size: 6mm (1/4")
 Terminal screws: 4mm (5/32")
 Dimensions 138 mm x 69 mm x 50 mmH
 (5.75" x 2.75" x 2"H)
 Current rating: 75A

INST-BB-6W2

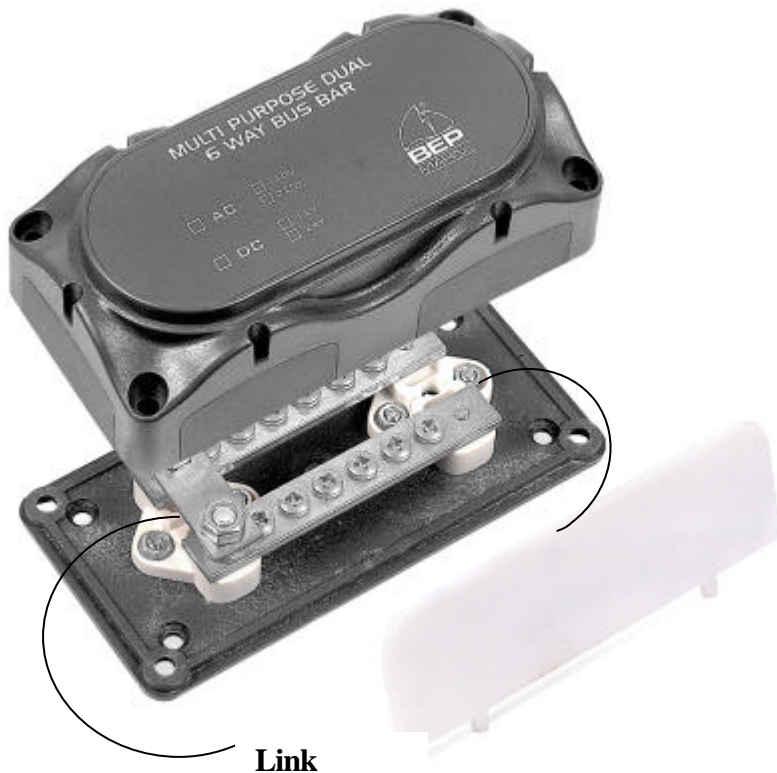

Link

Multi Purpose Bus Bar rated to 75 amps.

Allows for Bus Bars to be separated using insulation partition as supplied (as illustrated) or Bus Bars can be linked together using link supplied.

APPLICATIONS:

- DC negative & positive common or separated.
- AC Neutral Earth (linked or separate).

Insulation Partition

SPECIFICATIONS

Stud size: 6mm (1/4")
 Terminal screws: 4mm (5/32")
 Dimensions 138 mm x 69 mm x 50 mmH
 (5.75" x 2.75" x 2"H)
 Current rating: 75A

INST-BB-6W2